



IKUSI

IN

IN

**ikusiflow**

The first TV Smart  
Headend

Product .....	Page
FLOW IN2.....	3
FLOW IN4.....	4
FLOW SEC .....	5
FLOW ENC .....	6
FLOW OUT .....	7
FLOW HUB.....	8
FLOW BASE.....	9
FLOW PSU .....	10
FLOW RPSU REDUNDANT .....	11
FLOW COVER .....	12
FLOW STB .....	13
FLOW STB AC3+ .....	14
FLOW DEVICE MGR.....	15

## FLOW IN2



### Dual universal input module (IN2)

The FLOW IN2 module's function is to tune two independent signals, each of which can be in DVB-T/T2 terrestrial, DVB-C cable, or DVB-S/S2 satellite format.

These signals are then processed and sent in SPTS (Single Program Transport Stream) form to an external network or other modules in the same headend via the backpanel of the Ikusi FLOW chassis.

Model		FLOW IN2	
Ref.		4318	
<b>Inputs</b>			
Number of inputs connectors		2	
Number of tuners		2	
<b>Terrestrial mode</b>			
Frequency band	MHz	47 - 862	
Supported standards		DVB-T/T2	
<b>Cable mode</b>			
Frequency band	MHz	47 - 862	
Supported standards		DVB-C	
<b>Satellite mode</b>			
Frequency band	MHz	950 - 2150	
Supported standards		DVB-S/S2	
<b>IPTV output</b>			
Total SPTS		62	
Transmission protocols		UDP	
SAP protocol		Yes	
Interface type		Gigabit Ethernet	
Standard		1000Base-T	

General		
Power supply voltage	Vdc	24
Power consumption	W	6.5
Operating temperature	°C	0 ... +45
Weight	g	328
Dimensions (Height x Width x Depth)	mm	125 x 27 x 210

## FLOW IN4



### Quad universal input module (IN4)

The FLOW IN4 module's function is to tune four independent signals, each of which can be in DVB-T/T2 terrestrial, DVB-C cable, or DVB-S/S2 satellite format.

These signals are then processed and sent in SPTS (Single Program Transport Stream) form to an external network or other modules in the same headend via the backpanel of the Ikusi FLOW chassis.

<b>Model</b>	<b>FLOW IN4</b>		
Ref.	4319		
<b>Inputs</b>			
Number of inputs connectors	2		
Number of tuners	4		
<b>Terrestrial mode</b>			
Frequency band	MHz	47 - 862	
Supported standards	DVB-T/T2		
<b>Cable mode</b>			
Frequency band	MHz	47 - 862	
Supported standards	DVB-C		
<b>Satellite mode</b>			
Frequency band	MHz	950 - 2150	
Supported standards	DVB-S/S2		
<b>IPTV output</b>			
Total SPTS	60		
Transmission protocols	UDP		
SAP protocol	Yes		
Interface type	Gigabit Ethernet		
Standard	1000Base-T		

<b>General</b>		
Power supply voltage	Vdc	24
Power consumption	W	8
Operating temperature	°C	0 ... +45
Weight	g	460
Dimensions (Height x Width x Depth)	mm	125 x 27 x 210

# FLOW SEC



## Security module (SEC)

The FLOW SEC decrypts multiple services received from the backpanel of the Ikusi FLOW chassis.

For decrypting services, the FLOW SEC has two Common Interface slots where CAMs may be inserted. The total number of decrypted services depends on the CAM in use, the number of services, and the quantity of data flowing through the module.

The FLOW SEC module can encrypt the services on the output headend.

Model	FLOW SEC
Ref.	4311
<b>IPTV Inputs/outputs</b>	
Interface	Gigabit Ethernet
Standard	1000Base-T
VLAN support	Yes
Transmission protocols	UDP
<b>Common interface</b>	
Number of slots	2
Standard	EN50221
CAM Warm Reset	Yes
CAM Cold Reset	Yes
<b>Decryption</b>	
Channels of decryption capacity / CAM	2
Output SPTS per CAM	16
Total output SPTS	32
CAM reset on decryption failure	Yes

Encryption		
Supported DRMs	LG Pro:Idiom Samsung LINK Philips VSecure	
Simulcrypt interface	Yes	
Channel of encryption capacity	2	
SPTS per channel of encryption	Simulcrypt : 8 LG Pro:Idiom : 12 Samsung LINK : 16 Philips VSecure : 16	
General		
Power supply	VDC	24
Consumption (without CAM)	W	5.9
Operating temperature	°C	0 ... 45
Weight	g	328
Dimensions (Height x Width x Depth)	mm	125 x 27 x 210

# FLOW ENC



## Quad HDMI encoder module (ENC)

The FLOW ENC can be configured to encode video content in a variety of resolutions and formats through the easy-to use Ikusi FLOW web interface. The encoded streams are then sent by ethernet over the Ikusi FLOW backpanel to external IPTV networks, or to other modules for further processing and inclusion in RF output multiplexes.

<b>Model</b>	<b>FLOW ENC</b>		
<b>Ref.</b>	<b>4315</b>		
<b>Input</b>			
Number of video-audio digital inputs	4		
Input video format	HDMI		
Video standard	V1.4		
Digital audio	Yes (HDMI)		
<b>Compression</b>			
Video compression	MPEG2 MP@ML, H.264/MPEG4 AVC MP L4.1		
Audio compression	MPEG1 layer II, MPEG2_LE_ACC, MPEG4_HE_AAC		
Video quality	SD and HD (480i, 576i, 480p, 576p, 720p50, 720p60, 1080i50, 1080i60, 1080p25, 1080p30)		
Image format	4:3 / 16:9		
Video codec	MPEG2, H.264		
H.264 Profile	MPEG4 AVC MP, HP		
H.264 Level	3.0, 3.1, 3.2, 4.0, 4.1, 4.2		
Video Bitrate	MPEG2 H.264	kbps	2000-15000 2000-19000
Audio codec	MPEG1 Layer II MPEG2 AAC LE MPEG2 AAC HE MPEG4 AAC LE MPEG4 AAC HE		
Audio Bitrate		kbps	96, 128, 160, 192, 224, 256, 320, 384
Coding format	CBR in MPEG2 VBR in H.264		

<b>IPTV output</b>		
SPTS (Single Program Transport Stream)		4
Transmission protocols		UDP
SAP protocol		Yes
Interface		Gigabit Ethernet
Standard		1000Base-T
<b>General</b>		
Power supply voltage	V <sub>dc</sub>	24
Consumption	W	12 with four 1080i60 inputs in H.264
Operating temperature	°C	0 ... +45
Weight	g	525
Dimensions (Height x Width x Depth)	mm	125 x 27 x 210

## FLOW OUT



### Universal output module (OUT)

The FLOW OUT module generates 4 or 6 RF carriers (depending on the selected mode) in DVB-T, DVB-C or J.83 Annex B format.

When OUT4 mode is selected, 4 RF carriers will be generated. Each carrier can convey up to 8 television or radio services (SPTS).

When OUT 6 mode is selected, 6 RF carriers will be generated, each one with 6 television or radio services (SPTS) as maximum.

Each Ikusi Flow headend may have several OUT modules, whose RF carriers are all combined and amplified by the FLOW BASE.

Model		FLOW OUT
Ref.		4313
<b>Input IPTV</b>		
Interface type		Gigabit Ethernet
Standard		1000Base-T
VLAN support		Yes
<b>RF output</b>		
Number of outputs RF carriers		4 in OUT4 mode 6 in OUT6 mode
Number of SPTS per RF carriers		8 in OUT4 mode 6 in OUT6 mode
Total SPTS		32 in OUT4 mode 36 in OUT6 mode
Standards supported		DVB-T EN 300 744 DVB-C EN 300 429 J.83 Annex B
MER	dB	> 42
<b>General</b>		
Power supply voltage	V <sub>dc</sub>	24
Power consumption	W	21,5
Operating temperature	°C	0 ... +45
Weight	g	400
Dimensions (Height x Width x Depth)	mm	125 x 27 x 210

# FLOW HUB



## Control module (HUB)

The FLOW HUB is the central connecting element of the Ikusi FLOW headend, with a dual routing and control function. It routes the ethernet traffic in the headend, both internally between modules, and between the modules and the outside world. It also performs centralized management and configuration of the entire Ikusi FLOW headend and exposes the web interface for configuration and control through dedicated Wi-Fi and wired ethernet connections.

It is also able to detect existing RF channels in a network to avoid using them in the headend out.

Model	FLOW HUB	
Ref.	4314	
<b>Wi-Fi interface</b>		
Interface type	Wireless LAN	
Standard	Wi-Fi	
Radio band	GHz	2,4
Reception/Transmission mode	SISO	
TX power	dBm	-18
RX power	dBm	-96
Connection	SDIO controller	
Layer 3 addresses assignment	SoftAP / DHCP	
Security	WPA 2.0	
<b>External ethernet interface (control)</b>		
Number of interfaces	1	
Interface type	Gigabit Ethernet	
Standard	1000BASE-T	
VLAN support	IEEE VLAN	
<b>External ethernet Output (TV)</b>		
Number of interfaces	2	
Interface type	Gigabit Ethernet	
Standard	1000BASE-T	
VLAN support	IEEE VLAN	
<b>Backpanel ethernet interface</b>		
Number of interfaces	10	
Interface type	Gigabit Ethernet	
Standard	1000BASE-T	
VLAN support	IEEE VLAN	

<b>RF channels detection</b>		
<b>Terrestrial input</b>		
Supported standards	DVB-T/T2	
Frequency band	MHz	47 - 862
Input level in BASE	dBµV	> 45
<b>Cable input</b>		
Supported standards	DVB-C	
Frequency band	MHz	47 - 862
Input level in BASE	dBµV	> 50
<b>General</b>		
Power supply voltage	Vdc	24
Power consumption	W	11
Remote mode	IP (Wi-Fi or BASE-T)	
Operating temperature	°C	0 ... +45
RF input connectors (backpanel)	F (x1)	
External ethernet frontal connector (control)	RJ-45 single	
External ethernet frontal connector (TV)	RJ-45 dual	
USB frontal connector (control)	Type-A socket	
Weight	g	454
Dimensions (Height x Width x Depth)	mm	125 x 27 x 210



# FLOW BASE



## Backpanel (BASE)

The FLOW BASE incorporates a hybrid ethernet/RF backpanel unique to Ikusi FLOW, and manages the RF connectivity and energy use of all elements in the headend. The intelligent chassis controls all RF signals, power supply, and module hot-swap functions.

- An integrated multiswitch automatically routes satellite signals to the modules that require them.
- Universal F type connectors allow easy attachment to premises cabling.

A lightweight and robust design offers easy installation in a rack environment without the use of tools, and is also suitable for wall mount installations. Its modular structure allows it to be configured to meet almost any customer requirement.

Model		FLOW BASE	
Ref.		4312	
<b>Terrestrial / Cable mode</b>			
Number of inputs		2	
Frequency range	MHz	47 - 862	
Input level	dBμV	40 - 90 *	
Impedance	Ω	75	
<b>Satellite mode</b>			
Number of inputs		8	
Frequency range	MHz	950 - 2150	
Input level	dBμV	40 - 98	
Impedance	Ω	75	
<b>Output</b>			
Number of outputs		1	
Output frequency range	MHz	47 - 862	
Output level adjustment	dBμV	78 - 108	
Output level stability	dB	±1	
Spurious signal in band	dBc	< -60	
Broadband noise (Δ5 MHz)	dBc	< -65	
Impedance	Ω	75	
Output test	dB	-30	
<b>General</b>			
Power supply voltage	VDC	24	
Power consumption	W	10	

\* In order to avoid issues on the satellite reception, the terrestrial signal level can't exceed 80 dBμV. Use an external attenuator if necessary.

<b>Preamplifier powering</b>		
Inputs		TV1 and TV2
Adjustable voltage	Vdc	12/24
Max consumption per input	mA	100
<b>Universal / Quattro LNB powering</b>		
Inputs		SAT1 and SAT2
Voltage	Vdc	13V - 18V (selectable)
Tones insertion	kHz	0 - 22 (selectable)
Max consumption per input	mA	300
<b>Quattro LNB powering</b>		
Inputs		SAT3 to SAT8
Voltage	Vdc	12
Total max consumption	mA	600
Operating temperature	°C	0 ... +45
Mounting type		Wall-fixing / 19" Rack
Input/Output RF connectors		F (12)
Weight	kg	5
Dimensions (Height x Width x Depth)	mm	175 x 487.5 x 319

## FLOW PSU



### Power supply module (PSU)

The FLOW PSU delivers power to the headend efficiently and reliably. It has the capacity to power the most demanding headend configuration.

Model		FLOW PSU
Ref.		4308
Type		Switched-mode
Mains power supply voltage (50-60 Hz)	VAC	100 - 240
Output voltage	V	24
Maximum power	W	180
Efficiency	%	90
Operating temperature	°C	0 ... +45
Weight	g	840
Dimensions (Height x Width x Depth)	mm	125 x 38 x 210

## FLOW PSU REDUNDANT



Redundant power supply module (FLOW RPSU REDUNDANT).

The FLOW RPSU REDUNDANT provides the power required for the most exigent headend, ensuring uninterrupted power in the event of failure of one of the two available power supplies. The damaged power supply can be changed without disconnecting the headend from the power.

The FLOW RPSU REDUNDANT integrates two identical power supplies in a 1RU (rack unit) chassis.



Model		FLOW RPSU REDUNDANT
Ref.		4320
Type		Switched-mode
Input voltage (50-60 Hz)	VAC	100 - 240
Output voltage	V	24
Maximum power	W	180
Efficiency	%	90
Power factor		0.96
Number of redundant power supplies		2
Operating temperature	°C	0 ... +45
Weight	kg	3.3
Dimensions	mm	485 x 242 x 56

## FLOW COVER



Cover to the chassis (COVER)

The FLOW COVER includes 5 variable-speed fans to automatically maintain the modules installed in the headend within their designed temperature ranges.

A unique magnetic connection system allows the FLOW COVER to be attached or removed as needed, easily and without tools.

Model		FLOW COVER
Ref.		4316
Power supply voltage	Vdc	24
Power consumption	W	11
Operating temperature	°C	0 ... +45
Number of fans		5
Weight	g	1000
Dimensions (Height x Width x Depth)	mm	175 x 487 x 30

# FLOW STB



## Set Top Box (STB)

FLOW STB is a powerful Set-Top Box with efficient processor STiH207 and increased RAM memory. It is an optimal solution for IPTV/OTT projects.

<b>Model</b>		<b>FLOW STB</b>
<b>Ref.</b>		<b>1050</b>
<b>Hardware</b>		
Processor		STiH207
RAM	Mb	512
Flash memory	Mb	256
<b>Software</b>		
Operating system		Linux 2.6.23 Built-in Media Portal with WebKit-based IPTV-functionality HTTP 1.1, HTML 4.01 XHTML 1.0/1.1; DOM 1, 2, 3, CSS 1, 2, 3; XML 1.0, XSLT 1.0, XPath 1.0 ; SOAP 1.1; JavaScript ECMA-262, revision 5; Media JavaScript API; C layer SDK
<b>Interfaces</b>		
Audio output S/PDIF HDMI 1.4-output Composite + stereo A/V output Ethernet 100 Mb/s USB 2.0 (WiFi-adaptor can be connected)		
<b>Sources of media content</b>		
PC and NAS in local network, Stream media protocols (RTSP, RTP, UDP, IGMP, HTTP), USB-devices		
<b>Supported Audio-Video formats</b>		
Audio compression		MPEG-1 layer I/II, MPEG-2 layer II, MPEG-2 layer III (mp3), AC3, DTS (optional)
Audio formats		MP3, MPA, M4A, WMA (optional), Ogg, WAV
Video modes		1080i, 1080p, 720p, 576p, 480p, PAL, NTSC
Video compression		MPEG1/2 MP@HL, H.264 HP@level 4.1, MPEG4 part 2 (ASP), WMV-9 (optional), VC1 video, XviD; HD video supporting (up to 40 Mbit/s and above)
Video containers		MKV, MPEG-TS, MPEG-PS, M2TS, VOB, AVI, MOV, MP4, ASF, QT, WMV
Image formats		JPEG, PNG, BMP, GIF, RAW
Subtitles		DVB, SRT, text MKV
Playlist formats		M3U
<b>General</b>		
Operating temperature		°C 1 ... 40
Dimensions (width x depth x height)		mm 127 x 87 x 30
Weight		g 190
Standard set		FLOW STB Set-Top Box, user manual, mini jack cable to RCA (A/V), Power adapter 12V 1A, remote control, 2 AAA batteries, packaging

# FLOW STB AC3+



### Set-Top Box (STB)

- **FLOW STB AC3+** is a powerful Set-Top Box with efficient processor STiH207, increased RAM memory and AC3+ support. It is an optimal solution for IPTV/OTT projects.
- **FLOW-IRD-Extender (1051)**  
Infrared remote control extender.

<b>Model</b>		<b>FLOW STB AC3+</b>
<b>Ref.</b>		<b>4329</b>
<b>Hardware</b>		
Processor		STiH207
RAM	Mb	512
Flash memory	Mb	256
<b>Software</b>		
Operating system		Linux 2.6.23 Built-in Media Portal with WebKit-based IPTV-functionality HTTP 1.1, HTML 4.01 XHTML 1.0/1.1; DOM 1, 2, 3, CSS 1, 2, 3; XML 1.0, XSLT 1.0, XPath 1.0 ; SOAP 1.1; JavaScript ECMA-262, revision 5; Media JavaScript API; C layer SDK
<b>Interfaces</b>		
Audio output S/PDIF HDMI 1.4-output Composite + stereo A/V output Ethernet 100 Mb/s USB 2.0 (WiFi-adapter can be connected)		
<b>Sources of media content</b>		
PC and NAS in local network, Stream media protocols (RTSP, RTP, UDP, IGMP, HTTP), USB-devices		
<b>Supported Audio-Video formats</b>		
Audio compression		MPEG-1 layer I/II, MPEG-2 layer II, MPEG-2 layer III (mp3), AC3, AC3+, DTS (optional)
Audio formats		MP3, MPA, M4A, WMA (optional), Ogg, WAV
Video modes		1080i, 1080p, 720p, 576p, 480p, PAL, NTSC
Video compression		MPEG1/2 MP@HL, H.264 HP@level 4.1, MPEG4 part 2 (ASP), WMV-9 (optional), VC1 video, XviD; HD video supporting (up to 40 Mbit/s and above)
Video containers		MKV, MPEG-TS, MPEG-PS, M2TS, VOB, AVI, MOV, MP4, ASF, QT, WMV
Image formats		JPEG, PNG, BMP, GIF, RAW
Subtitles		DVB, SRT, text MKV
Playlist formats		M3U
<b>General</b>		
Operating temperature		°C 1 ... 40
Dimensions (width x depth x height)		mm 127 x 87 x 30
Weight		g 190
Standard set		FLOW STB AC3+ Set-Top Box, user manual, mini jack cable to RCA (A/V), Power adapter 12V 1A, remote control, 2 AAA batteries, packaging



<b>Model</b>		<b>FLOW-IRD-Extender</b>
<b>Ref.</b>		<b>1051</b>
<b>Description</b>		Infrared remote control extender

# FLOW DEVICE MGR



## Management software (MGR)

The new functionality integrated into Ikusi Flow allows the STB-IP to be controlled in a centralized way.

Model	FLOW DEVICE MGR
Ref.	4317


### Main features

- Integrated into the control module (HUB) of Ikusi Flow.
- It is activated through a license that never expires and does not need renewal.
- FLOW DEVICE MGR generates a list of multicast channels for the STB-IP from Ikusi flow
- This list is generated automatically in case of any change in the headend.
- When STB-IP is connected, the headend assigns automatically an IP address (DHCP protocol).
- In the same IP assignment response, the URL to which it should connect is indicated in order to download the updated channel list.
- The default channel that should be shown on the STB at startup, can be centrally fixed.

### Supported devices

- FLOW STB
- FLOW STB AC3+
- LG TV with HCAP HTML5 API
- Samsung TV with H.BROWSER API\*
- Philips TV with JAPIT API

\* Remote switch off or switch on of Samsung TVs is not supported

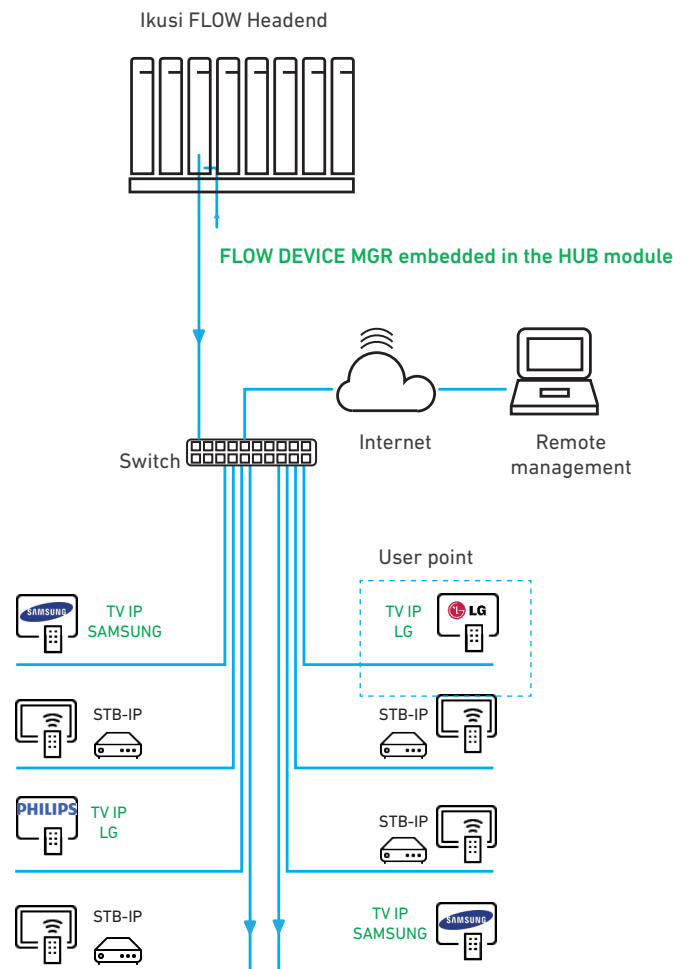



**High density**  
 Small footprint per channel  
 Capable of processing more than  
 200 SD services or 120 HD services



**Multistandard**  
 Ikusi Flow adapts to your present  
 and to your future



**Content driven**  
 Manages content and  
 not technical parameters  
 User friendly interface which  
 minimizes configuration time



No need for  
 additional licenses



**One platform for  
 all your TV needs**  
 Designed to convert any TV input  
 into any TV output standard



**Double secure**  
 Premium content always protected  
 by including DRM protection



# International presence



Ikusi Multimedia  
Donostia Ibilbidea, 28  
20115 Astigarraga  
Gipuzkoa, España  
Tel.: +34 943 44 88 95  
television@ikusi.com  
www.ikusi.tv

ESPAÑA  
Pol. Ind. San Marcos  
c/ Morse esq. Franklin  
28906 Getafe, Madrid  
Tel.: +34 915 15 51 10  
television@ikusi.com  
www.ikusi.tv

FRANCE  
62 avenue du 8 mai 1945  
64101 Bayonne Cedex  
Tel.: +33 1 42 84 87 12  
france.tv@ikusi.com  
www.ikusi.tv/fr

MIDDLE EAST  
6WA-504, Dubai  
Airport Free Zone  
PO Box: 54585 Dubai - U.A.E.  
Telf: +971 4 2994770  
Fax: +971 4 2994775  
dubai.tv@ikusi.com  
www.ikusi.tv/en

AUSTRALIA - NEW ZEALAND  
7 Amsted Road  
3153 Bayswater (Victoria)  
Telf: +61 3 97208000  
Fax: +61 3 97207422  
australia.tv@ikusi.com  
www.ikusi.tv/en