


TAPS

TAP 8 WAY F TYPE 16 dB 5 ... 1000 MHz

FOXTEL: F30740

Product Code: AS8TF16/II

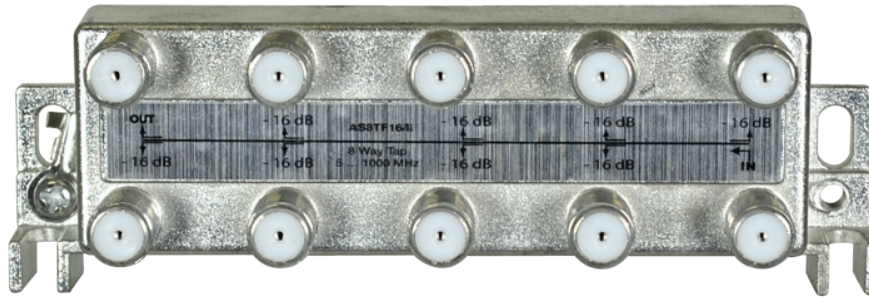

Specifications	Frequency (MHz)	AS8TF16/II
Insertion loss IN-OUT (dB)	5-40	≤ 9.0
	40-470	≤ 9.5
	470-862	≤ 10.0
	862-1000	≤ 10.5
Tap loss IN-TAP (dB)	5-40	16.5 ± 1.5
	40-470	16 ± 1.5
	470-862	16 ± 1.5
	862-1000	16.5 ± 1.5
Isolation TAP-TAP (dB)	5-40	≥ 38
	40-470	≥ 40
	470-862	≥ 38
	862-1000	≥ 34
Isolation OUT-TAP (dB)	5-40	≥ 28
	40-470	≥ 26
	470-862	≥ 23
	862-1000	≥ 21
Return Loss IN-OUT & TAP (dB)	5-40	≥ 16.0
	40-470	≥ 16.0
	470-862	≥ 16.0
	862-1000	≥ 16.0
Impedance	75 Ω	
Temperature range	-20 °C ... +60 °C, Storage: -40 °C ... +70 °C	
IP rating	IP20 Min	
Housing	Zinc Die Cast, Bright Tin finish and Solder Shield Bottom Plate	
Wall mounting screws	$\pm$ PM 4 x 18 A3 Nickel-plated, 2 pcs	
Power pass	Input > Output	
Earthing terminal	Yes	